



# PRODUCT CATALOGUE

2024-25



STATE HI-TECH ENTERPRISE AWARD OF SOCIAL RESPONSIBILITY

**MANUFACTURER:**

**REECON M & E CO.,LTD.**

ADD:10 ZHONG CUI ROAD, NANJING, 211151 JIANGSU, CHINA  
EMAIL:info@reecon.com.cn

**EXPORTER:**

**DU-HOPE INTERNATIONAL GROUP**

ADD:199 JIAN YE ROAD, NANJING, 210004 JIANGSU, CHINA  
EMAIL:chenf@du-hope.com





### GLOBAL WARMING AND SPACE HEATER

"If global warming increases, some compound extreme events will become more frequent, with higher likelihood of unprecedented intensities, durations or spatial extent (high confidence)". (AR6\_Longer Report, CLIMATE CHANGE 2023, Synthesis Report by IPCC, the UN Intergovernmental Panel of Climate Change). It's furthermore predicted that such kind of extreme events, those might happen once in one hundred years, could be annual repeated since 2024.

There will be probably neither "cold summer", nor "warm winter" anymore. The Arctic ice cap is melting at such a rate that in winter and spring there will be more strong cold storms spreading southwards even over the Tropic of Cancer.


























Immediate actions should be taken to reduce the consumption of fossil fuels in order to reduce the emission of green house gases. Meanwhile, we have to select adequate heating devices to protect our plants, our pets, as well as ourselves from unexpected chilly cold storms. Space heaters for temporary use may be one of the best choices.

Since 2002 Reecon has been focused on the research, developing and manufacturing of gas and oil fired space heaters, as well as electric commercial heaters. More than 3,000,000 units of space heaters from Reecon are providing people all over the world with warm comforts.

**REECON—YOUR WARM PARTNER**



## CONTENT

	Hybrid Oil Fired Air Radiant Heater .....	01-02
	Oil Fired Radiant Heater .....	02
	Oil Fired Forced Air Heater Gear Pump Type .....	03-04
	Oil Fired Forced Air Heater Vaccum Atomization Type .....	05-06
	Oil Fired Forced Air Indirect Heater .....	07
	Kerosene Fired Convection Heater .....	08
	Gas Fired Forced Air Heater .....	09-12
	Hybrid Gas Fired Air Heater .....	13
	Gas Fired Terrace Infrared Heater .....	14
	Gas Room Cabinet Heater .....	15-16
	Gas Room Wall Heater .....	17-18
	Gas Log Sets .....	19-20
	Fire Box Inserts .....	21
	Gas Fire Places .....	22
	Freestanding Gas Stove .....	23
	Electrical Commercial Heater .....	24-26
	Fire Pit .....	27
	fire Table .....	28
	Patio Heater .....	29-30
	Tank Top Heater .....	31
	Camping Grill & Stove .....	32
	Hand Torch .....	33
	High Pressure Hot Water Washer .....	34
	High Pressure Cold Water Washer/sprayer .....	35
	heating & Venting Combat .....	36

# HYBRID AC-DC

## OIL FIRED FORCED AIR RADIANT HEATER

MODEL DC 90



Model	DC 90	Fuel tank (l/gallons)	15/4.0
Heat output kW/btu	26/90000	Power consumption Watt/h	36
Heat up to (m <sup>2</sup> /sq.ft)	210/2250	Rated power supply AC	110-240 V, 50-60 Hz
Fuel consumption (ltr/gal)	2.6/0.68	Rated power supply DC	18-24 V

⚠ The place of use should have good ventilation to avoid insufficient oxygen supply!

### DC 90 HYBRID AC-DC OIL FIRED FORCED AIR RADIANT HEATER



Ergonomic handle

Unique designed burning chamber creating high infrared radiant effect


Class-C certified PCBA ensuring high operation safety

Nozzle with pressure switch from Danfoss

Silent solenoid pump

Compartment for 2 battery packs

Patented interface design for power changes between AC and DC

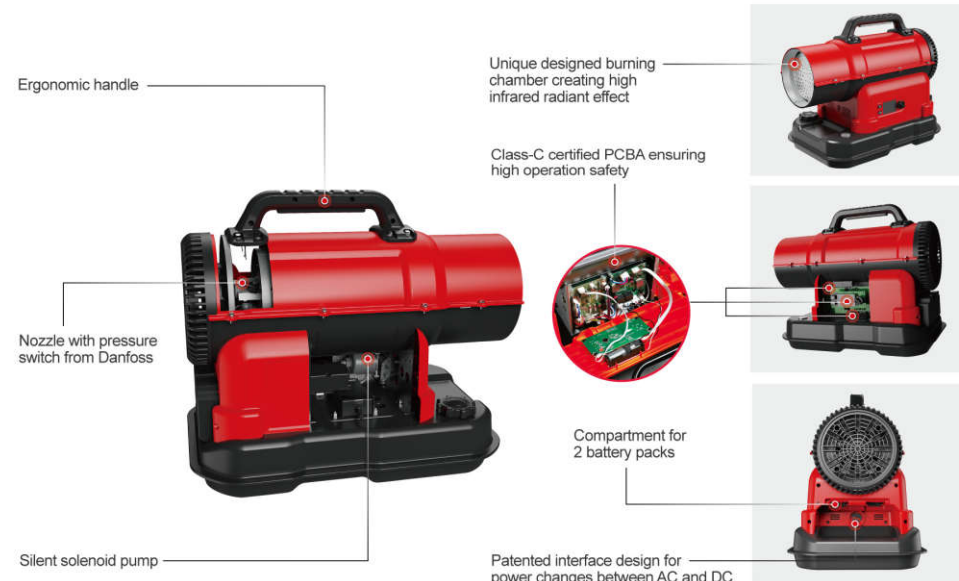

### REO 21M OIL FIRED RADIANT HEATER



Model	REO 21M
Heat output (kW/btu)	21/61000
Fuel consumption	2.1/0.55
Fuel tank (l/gallons)	15/4.0
Rated power supply	110-120 V/60 Hz, 220-240 V/50 Hz



⚠ The place of use should have good ventilation to avoid insufficient oxygen supply!

# OIL FIRED FORCED AIR HEATER

## GEAR PUMP TYPE



Combustion chamber out of super heat-resistant stainless steel  
Unique design ensuring clean combustion



Patented air introduction system



Pressure atomization nozzle from **Danfoss**



Rolling welded fuel tank with indicator

Heavy-duty motor with long service life

Specially designed **Danfoss** gear pump for industrial and commercial purpose  
Maintenance free and super low noise  
Suitable for dusty condition

## OIL FIRED FORCED AIR HEATER GEAR PUMP TYPE



- One Touch Operation
- PCB controlled
- Automatic ignition
- Automatic shut off in all failures
- Self diagnose and failure warnings
- Patented atomization design ensuring best burning and lowest emission
- Dafoss gear pump specially designed for Reecon



Model	REO 20G	REO 30G	REO 50G	REO 80G	REO 100G
Heat output EU type (kW)	20 kW	30 kW	50 kW	80 kW	100 kW
Fuel consumption (l/h) approx	2.0	3.0	5.0	8.0	10.0
Heat output US type (btu)	80000	125000	200000	300000	400000
Fuel consumption (gal./h)	0.62	0.97	1.55	2.32	3.10
Heat up to EU type (m <sup>2</sup> )	160	240	400	560	800
Heat up to US type (sq. ft)	2000	3125	5000	7500	10000
Fuel tank (l/gallons)	15/4.0	37/10.0	57/15.0	57/15.0	57/15.0
Integrated thermostat	Y	Y	Y	Y	Y
Receptacle for remote thermostat	Y	Y	Y	Y	Y
Rated power supply	110-120 V/60 Hz 220-240 V/50 Hz	110-120 V/60 Hz 220-240 V/50 Hz	110-120 V/60 Hz 220-240 V/50 Hz	110-120 V/60 Hz 220-240 V/50 Hz	110-120 V/60 Hz 220-240 V/50 Hz



LOW TEMPERATURE OPERATION



THERMOSTATICALLY CONTROLLED



MULTI-FUEL



LESS MAINTENANCE REQUIRED



INDUSTRIAL DURABILITY



OUTDOOR USE

# OIL FIRED FORCED AIR HEATER


## VACUUM ATOMIZATION TYPE



### OIL FIRED FORCED AIR HEATER VACUUM ATOMIZATION TYPE



Combustion chamber out of super heat-resistant stainless steel

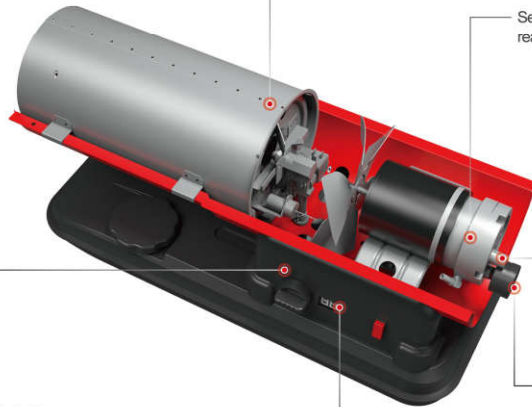

Self-lubricated compressor ensuring reasonable service life

Class-C certified PCBA ensuring high operation safety

Digital temperature setting and displaying

Pressure adjustable

Pressure gauge (not applicable for REO 20)

### OIL FIRED FORCED AIR HEATER VACUUM ATOMIZATION TYPE



- One touch operation
- PCB controlled
- Automatic ignition
- Automatic shut off in all failures
- Self diagnose and failure warnings
- Patented atomization design ensuring best burning and lowest emission
- Low ambient temperature ignition (-30 °C/-22 °F)



Model	REO 20	REO 30	REO 40	REO 50
Heat output EU type (kW)	20 kW	30 kW	40 kW	50 kW
Fuel consumption (l/h)	2.0	3.0	4.0	5.0
Heat output US type (btu)	80000	125000	185000	210000
Fuel consumption (gal./h)	0.62	0.97	1.43	1.63
Heat up to EU (m <sup>3</sup> )	160	240	320	400
Heat up to US (sq. ft)	2000	3125	4625	5000
Fuel tank (l/gallons)	15/4.0	37/10.0	57/15.0	57/15.0
Integrated thermostat	Y	Y	Y	Y
Receptacle for remote thermostat	N	N	N	N
Rated power supply	110-120 V/60 Hz 220-240 V/50 Hz	110-120 V/60 Hz 220-240 V/50 Hz	110-120 V/60 Hz 220-240 V/50 Hz	110-120 V/60 Hz 220-240 V/50 Hz



LOW TEMPERATURE OPERATION



THERMOSTATICALLY CONTROLLED



MULTI-FUEL



LESS MAINTENANCE REQUIRED



INDUSTRIAL DURABILITY



OUTDOOR USE

## OIL FIRED FORCED AIR INDIRECT HEATER

- One touch operation
- PCB controlled
- Remote thermostat (not included) controlled
- With flue gas duct suitable for universal purpose
- High heating output efficiency
- Patented heat exchange chamber
- Low ambient temperature ignition (-30 °C/-22 °F)




Model	REO 30 I
Heat input (kW)	30
Heat output (kW)	25
Heating efficiency (%)	83
Hot air flow (m <sup>3</sup> /h)	1000
Heat up to (m <sup>2</sup> )	200
Fuel consumption (l/h)	3.0
Fuel tank (l/gallons)	37/10.0
Integrated thermostat	Y
Remote thermostat receptacle	Y
Rated power supply	110–120 V/60 Hz, 220–240 V/50 Hz

Model	REO 50 I
Heat input (kW)	50
Heat output (kW)	45
Heating efficiency (%)	90
Hot air flow (m <sup>3</sup> /h)	2000
Heat up to (m <sup>2</sup> )	360
Fuel consumption (l/h)	5.0
Fuel tank (l/gallons)	57/15.0
Integrated thermostat	Y
Remote thermostat receptacle	Y
Rated power supply	110–120 V/60 Hz, 220–240 V/50 Hz

Patented air introducing design

Powerful motor fan with high airflow volume

Pressure atomization nozzle from 


Enclosed maintenance free gear pump from  extreme low noise, suitable to heavy dusty condition



Rolling welded fuel tank with indicator



Combustion and heat exchange chamber out of high grade stainless steel with high exchanging efficiency



## KEROSENE FIRED CONVECTION HEATER



Model	REV 7000
Heat output (kW/btu)	7 kW/23500 btu
Fuel type	kerosene
Fuel consumption (ltr/h, gal/h)	0.70/0.18
Heat up to (m <sup>2</sup> /sq.ft)	56/875
Ignition	battery operated
Heat setting (steps)	3
Fuel tank (l/gallons)	15/4.0

Model	REV 3500
Heat output (kW/btu)	3.5 kW/11500 btu
Fuel type	Kerosene
Fuel consumption (ltr/h, gal/h)	0.35/0.09
Heat up to (m <sup>2</sup> /sq.ft)	28/438
Ignition	battery operated
Heat setting (steps)	1
Fuel tank (l/gallons)	15/4.0




 The place of use should have good ventilation to avoid insufficient oxygen supply!

 The place of use should have good ventilation to avoid insufficient oxygen supply!

# GAS FIRED FORCED AIR HEATER

WITH QUIET BURNER TECHNOLOGY

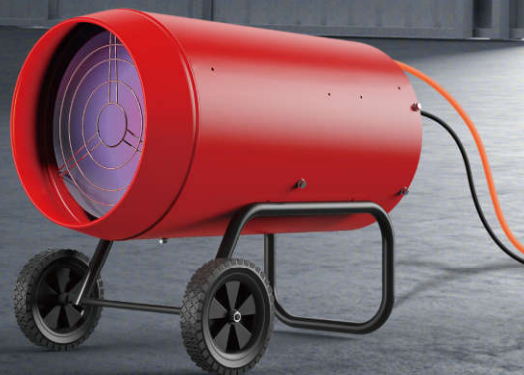

Air proven switch provides with **safety protection** in failure of motor or fan

Powder coated or stainless steel housing upon choice

Specially designed burner ensuring extreme low emission

Flame sensor provides with **safety protection** in failure of flame



Silent motor fan with high air volume

Solenoid valve provides with **safety protection** in failure of power outage

HLS provides with **safety protection** in failure of overheat or back fire

## GAS FIRED FORCED AIR HEATER EU TYPE

- Flame sensor provides with safety protection in failure of flame
- HLS provides with safety protection in failure of overheat or back fire
- Solenoid valve provides with safety protection in failure of power outage
- Air proven switch provides with safety protection in failure of motor or fan



Model	REF 10	REF 15	REF 20A	REF 30	REF 30A	REF 30T
Fuel type	L <sub>n</sub> , L <sub>r</sub> , L <sub>np</sub>	L <sub>n</sub> , L <sub>r</sub> , L <sub>np</sub>	L <sub>n</sub> , L <sub>r</sub> , L <sub>np</sub>	L <sub>n</sub> , L <sub>r</sub> , L <sub>np</sub>	L <sub>n</sub> , L <sub>r</sub> , L <sub>np</sub>	L <sub>n</sub> , L <sub>r</sub> , L <sub>np</sub>
Heat output (kW)	10	15	10-20 Adjustable	30	20-30 Adjustable	20-30 adjustable
Working pressure mbar	300	500	690	1500	1500	1500
Heat up to (m <sup>2</sup> )	80	120	160	240	240	240
Max. gas consumption (kg/h)	0.78	1.17	1.56	2.34	2.34	2.34
Ignition	Piezo	Piezo	electric	electric	electric	automatic (PCBA controlled)
Integrated thermostat	N	N	N	N	N	Y
Rated power supply	220-240 V/60 Hz	220-240 V/60 Hz	220-240 V/60 Hz	220-240 V/60 Hz	220-240 V/60 Hz	220-240 V/60 Hz



Model	REF 50A	REF 50T	REF 70A	REF 70T
Fuel type	L <sub>n</sub> , L <sub>r</sub> , L <sub>np</sub>	L <sub>n</sub> , L <sub>r</sub> , L <sub>np</sub>	L <sub>n</sub> , L <sub>r</sub> , L <sub>np</sub>	L <sub>n</sub> , L <sub>r</sub> , L <sub>np</sub>
Heat output (kW)	30-50 adjustable	30-50 adjustable	40-70 adjustable	40-70 adjustable
Working pressure mbar	1500	1500	1500	1500
Heat up to (m <sup>2</sup> )	400	400	560	560
Max. gas consumption (kg/h)	3.92	3.92	5.46	5.46
Ignition	electric	automatic (PCBA controlled)	electric	automatic (PCBA controlled)
Integrated thermostat	N	Y	N	Y
Rated power supply	220-240 V/60 Hz	220-240 V/60 Hz	220-240 V/60 Hz	220-240 V/60 Hz

⚠ The place of use should have good ventilation to avoid insufficient oxygen supply!

⚠ The place of use should have good ventilation to avoid insufficient oxygen supply!

# GAS FIRED FORCED AIR HEATER

## WITH WARM FLAME TECHNOLOGY

- Flame sensor
- Over heater cut off
- Back fire protection
- Power off protection
- Specially designed burner ensuring extreme low emission
- Regulator and gas hose (10ft) included
- Powder coated finishing or stainless steel (marked with S) housing



⚠ The place of use should have good ventilation to avoid insufficient oxygen supply!

## GAS FIRED FORCED AIR HEATER US TYPE



- Flame sensor
- Over heater cut off
- Back fire protection
- Power off protection
- Specially designed burner ensuring extreme low emission
- Regulator and gas hose (10 ft) included
- Powder coated finishing or stainless steel (marked with S) housing



Model	REF 10A	REF 20A	REF 30A	REF 50A
Fuel type	LP	LP	LP	LP
Heat output	38000	30000-65000	65000-125000	12500-180000
Working pressure	11" WC	10 psi	20 psi	20 psi
Heat up to (sq.ft)	950	1625	3125	4500
Max. gas consumption lbs/h	1.90	3.25	6.25	8.99
Ignition	electric	electric	electric	electric
Rated power supply	110-120 V/60 Hz	110-120 V/60 Hz	110-120 V/60 Hz	110-120 V/60 Hz



⚠ The place of use should have good ventilation to avoid insufficient oxygen supply!



**HYBRID DC/AC GAS FIRED FORCED AIR HEATER**



Brushless DC motor

Silent diffusion burner

Push in electric ignition button



3-5 Ah battery pack, supporting customization of various types of battery packs



Model	REF 20DC
Fuel type	Is, Is, Is/LP
Heat output kW/btu	15-20/5100-70000
Working pressure (mbar/psi)	690/10
Heat up to (m <sup>2</sup> /sq.ft)	160/1750
Max. gas consumption (kg/h, lbs/h)	1.56/3.44
Ignition	electric
Power consumption Watt/h	8
Power supply AC	110-240 V/50-60 Hz
Power supply DC	12-24 V

Model	REF 50DC
Fuel type	Is, Is, Is/LP
Heat output kW/btu	30-50/105000-175000
Working pressure (mbar/psi)	1500/20
Heat up to (m <sup>2</sup> /sq.ft)	400/4375
Max. gas consumption (kg/h, lbs/h)	3.90/8.59
Ignition	electric
Power consumption Watt/h	19
Power supply AC	110-240 V/50-60 Hz
Power supply DC	12-24 V




⚠ The place of use should have good ventilation to avoid insufficient oxygen supply!

# TIP OVER PROTECTION



- **ENERGY SAVING**  
Infrared radiant instead of convection
- **COMFORT HEATING**  
Warm your feet and whole body instead of your head and the air over
- **FLEXIBLE MOVING**  
Castor wheels instead of heavy fixed base
- **EASY TRANSPORTING**  
Tailgating instant use instead of on spot assembling
- **REQUIRES NO ELECTRICITY**  
Great for outdoor use with no electrical cords  
Uses a piezo igniter and runs on propane
- **ENCLOSED PROPANE TANK**  
Propane tank is hidden inside the heater for a cleaner, more compact design
- **COOL TOUCH TOP**  
A cold beverage can be placed on top of the heater

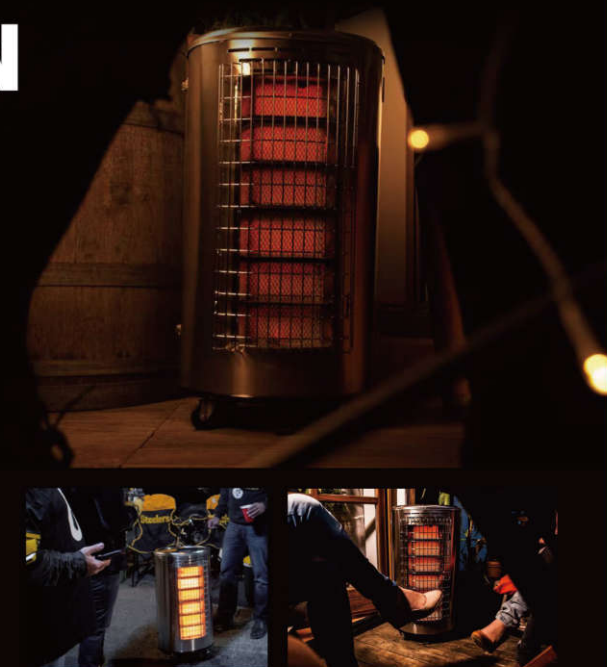

**TIR 6000 GAS FIRED TERRACE INFRARED RADIATOR**

Model	TIR 6000
Fuel type	Is, Is, Is/LP
Heat output kW/btu	3-6/10500-20000
Working pressure (mbar/wc)	30-50/11"
Heat up to (m <sup>2</sup> /sq.ft)	400/4375
Max. Gas consumption (kg/h, lbs/h)	0.43/0.95
Ignition	Piezo



⚠ The place of use should have good ventilation to avoid insufficient oxygen supply!

# GAS ROOM HEATER

**BLUE FLAME**

**CABINET GAS ROOM HEATER**



- No electricity required
- With ODS to shut off automatically when oxygen in room drops below a safe level
- With cylinder cabinet for 11 kg or 5 kg gas cylinder and castors for easy moving
- Ventfree to keep all warm in room
- Heat output controlled by built in thermostat (T models only)
- Regulator and gas hose included



Model	RB 4200 IT	RB 4200 DT	RB 4200 A	RB 4200 B	RB 4200 D	RB 4200 JT
Fuel type	ls, ls, lse/LP	ls, ls, lse/LP	ls, ls, lse/LP	ls, ls, lse/LP	ls, ls, lse/LP	ls, ls, lse/LP
Max. heat output	4.2 kW/15000 btu	4.2 kW/15000 btu	4.2 kW/15000 btu	4.2 kW/15000 btu	4.2 kW/15000 btu	4.2 kW/15000 btu
Heat up to (m <sup>2</sup> /sq.ft)	33.6 /375	33.6 /375	33.6 /375	33.6/375	33.6/375	33.6/375
Max. gas consumption	0.33 kg/h, 0.75 lb/h	0.33 kg/h, 0.75 lb/h	0.33 kg/h, 0.75 lb/h	0.33 kg/h, 0.75 lb/h	0.33 kg/h, 0.75 lb/h	0.33 kg/h, 0.75 lb/h
Ignition	Piezo	Piezo	Piezo	Piezo	Piezo	Piezo
Heat setting	2 steps, 2.1 kW/7500 btu, 4.2 kW/15,000 btu	2 steps, 2.1 kW/7500 btu, 4.2 kW/15,000 btu	3 steps, 1.4 kW/5000 btu, 2.8 kW/10000 btu, 4.2 kW/15000	3 steps, 1.4 kW/5000 btu, 2.8 kW/10000 btu, 4.2 kW/15000	2 steps, 2.1 kW/7500 btu, 4.2 kW/15,000 btu	1 step designed for green house
Temperature setting appro.	13-32 °C/55-90 F	13-32 °C/55-90 F	N/A	N/A	N/A	5-32 °C/41-90 F

# CABINET GAS ROOM HEATER

**INFRARED RADIANT**



Model	RC 4200 B	RC 4200 A	RC 4200 C
Fuel type	ls, ls, lse/LP	ls, ls, lse/LP	ls, ls, lse/LP
Max. heat Output	4.2 kW/15000 btu	4.2 kW/15000 btu	4.2 kW/15000 btu
Heat up to (m <sup>2</sup> /sq.ft)	33.6 /375	33.6 /375	33.6 /375
Max. gas consumption	0.33 kg/h, 0.75 lb/h	0.33 kg/h, 0.75 lb/h	0.33 kg/h, 0.75 lb/h
Ignition	Piezo	Piezo	Piezo
Heat setting	3 steps, 1.4 kW/5000 btu, 2.8 kW/10000 btu, 4.2 kW/15000	3 steps, 1.4 kW/5000 btu, 2.8 kW/10000 btu, 4.2 kW/15000	3 steps, 1.4 kW/5000 btu, 2.8 kW/10000 btu, 4.2 kW/15000
Temperature setting appro.	N/A	N/A	N/A



HEAT DISTRIBUTION




HEAT DISTRIBUTION

⚠ The place of use should have good ventilation to avoid insufficient oxygen supply!

⚠ The place of use should have good ventilation to avoid insufficient oxygen supply!

# GAS WALL HEATER

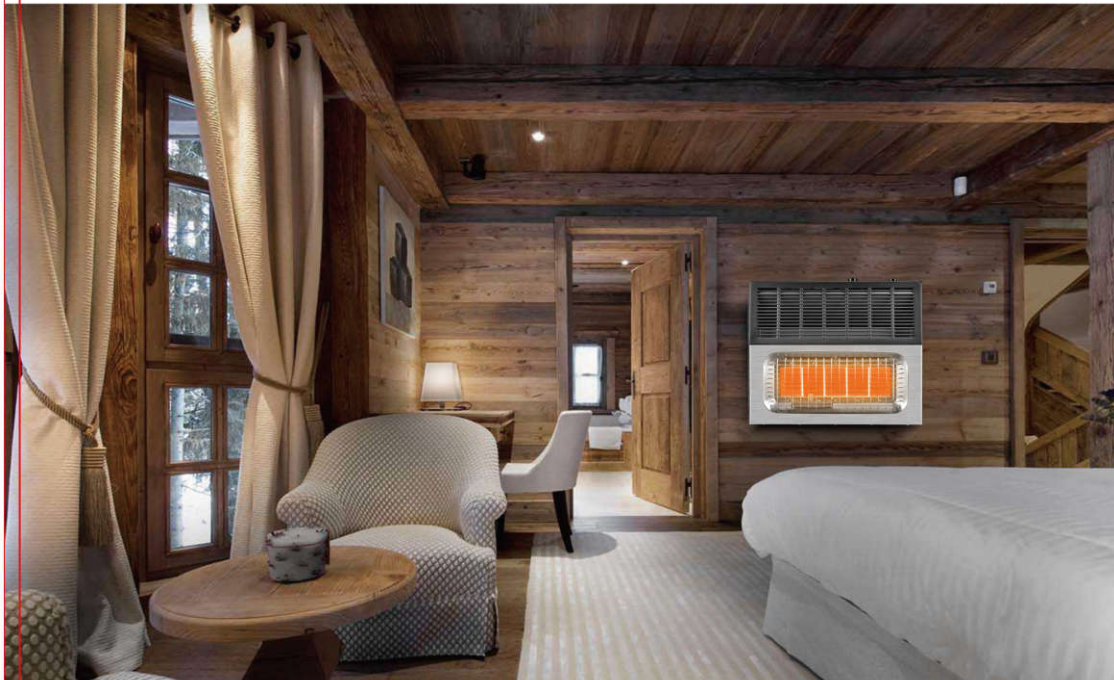

## GAS FIRED WALL HEATER



- With ODS to shut off automatically when oxygen in room drops below a safe level
- Enclosed flame cabinet providing more safer using
- With room temperature thermostat to save energy
- Ventfree to keep all warm in room
- Easy to be installed
- Stainless steel front
- No electricity required




Model	WLT-60 WNT-60 WDFT-60	WLT-100 WNT-100 WDFT-100	WLT-320 WNT-320 WDFT-320	WLT-60-IR WNT-60-IR WDFT-60-IR	WLT-100-IR WNT-100-IR WDFT-100-IR	WLT-250-IR WNT-250-IR WDFT-250-IR
Fuel type *	LP/NAT/Dual Fuel	LP/NAT/Dual Fuel	LP/NAT/Dual Fuel	LP/NAT/Dual Fuel	LP/NAT/Dual Fuel	LP/NAT/Dual Fuel
Heating type	blue flame convection	blue flame convection	blue flame convection	Infrared radiant	Infrared radiant	Infrared radiant
Max. heat output	6,000 btu	10,000 btu	32,000 btu	6,000 btu	10,000 btu	25,000 btu
Inlet gas pressure	LP=11" WC, NAT=8" WC	LP=11" WC, NAT=8" WC	LP=11" WC, NAT=8" WC	LP=11" WC, NAT=8" WC	LP=11" WC, NAT=8" WC	LP=11" WC, NAT=8" WC
Suitable to	bathroom/1 car garage	2 car garage	3 car garage	bathroom/1 car garage	2 car garage	3 car garage
Ignition	Electric (R40 battery)	Electric (R40 battery)	Electric (R40 battery)	Electric (R40 battery)	Electric (R40 battery)	Electric (R40 battery)
Temperature	13-32 °C/55-90 F	13-32 °C/55-90 F	13-32 °C/55-90 F	13-32 °C/55-90 F	13-32 °C/55-90 F	13-32 °C/55-90 F
Setting appro.						



\*Remarks: Patented Dual Fuel technology with automatic gas source recognition.

# GAS LOG SETS

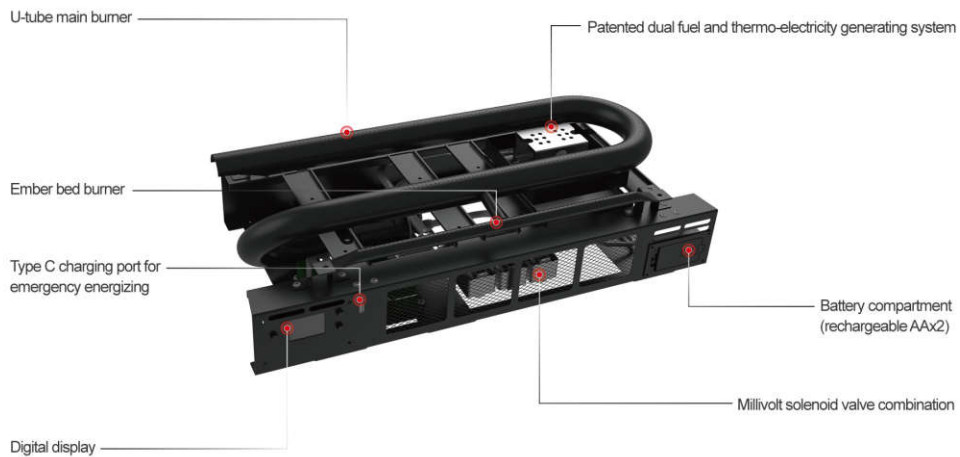

⚠ The place of use should have good ventilation to avoid insufficient oxygen supply!

## GAS LOG SETS



- Painted ceramic logs with realistic looking appearance
- No electricity required
- With ODS to shut off automatically when oxygen in room drops below a safe level
- Real yellow flame
- Dual Fuel technology
- Optional remote control with temperature and flame height setting



Model	GLL-18T-VF GLN-18T-VF GLDF-18T-VF	GLL-24T-VF GLN-24T-VF GLDF-24T-VF	GLL-30T-VF GLN-30T-VF GLDF-30T-VF	GLL-24R-VF GLN-24R-VF GLDF-24R-VF	GLL-30R-VF GLN-30R-VF GLDF-30R-VF
Max. heat output	35000	35000	35000	35000	35000
Vent type	Vent free	Vent free	Vent free	vent free	vent free

Model	GLL-18T-V GLN-18T-V GLDF-18T-V	GLL-24T-V GLN-24T-V GLDF-24T-V	GLL-30T-V GLN-30T-V GLDF-30T-V	GLL-24R-V GLN-24R-V GLDF-24R-V	GLL-30R-V GLN-30R-V GLDF-30R-V
Max. heat output	35000	35000	40000	35000	40000
Vent type	Vented	Vented	Vented	Vented	Vented
Fuel type	LP/NAT/Dual Fuel	LP/NAT/Dual Fuel	LP/NAT/Dual Fuel	LP/NAT/Dual Fuel	LP/NAT/Dual Fuel
Inlet gas pressure	LP=11" WC, NG=8" WC	LP=11" WC, NG=8" WC	LP=11" WC, NG=8" WC	LP=11" WC, NG=8" WC	LP=11" WC, NG=8" WC
Suitable fire box size	18"	24"	30"	24"	30"
Flame setting	1	1	1	3	3
Integrated thermostat	Y	Y	Y	Y	Y
Remote control	N	N	N	Y	Y
Nos. of burner	2	2	2	2	2
Nos. of log	4	5	6	5	6



⚠ The place of use should have good ventilation to avoid insufficient oxygen supply!

# FIRE BOX INSERT



## FIRE BOX INSERT

- Patented Dual Fuel Technology (propane or natural gas)
- Ceramic simulated log with realistic appearance
- Vent Free, doesn't require any outside venting
- Oxygen depletion sensor
- Electronic ignition
- Metal firebox

GLL-18T-VF  
GLN-18T-VF  
GLDF-18T-VF



GLL-24T-VF  
GLN-24T-VF  
GLDF-24T-VF  
(Remote type optional)



GLL-30T-VF  
GLN-30T-VF  
GLDF-30T-VF  
(Remote type optional)



Model	GFB-18	GFB-24	GFB-30
Fuel type	LP/NG	LP/NG	LP/NG
Heat Output	35000	35000	40000
Size	18"	24"	30"

# GAS FIRE PLACE



## GAS FIRE PLACE

- Ceramic simulated log with realistic appearance
- Vent Free, doesn't require any outside venting
- Patented Dual Fuel Technology
- Optional remote control with temperature & flame height setting
- Oxygen depletion sensor
- Electronic ignition
- Decorative Cherrywood mantel



Model	REGF-35	REGF-50
Max. heat output	35000 btu	50000 btu
Height (mm)	1250	1250
Width (mm)	1170	1510
Depth	510	510

# FREESTANDING GAS STOVE



## FREESTANDING GAS STOVE

- Painted ceramic logs with realistic looking appearance
- No electricity required
- With ODS to shut off automatically when oxygen in room drops below a safe level
- Real yellow flame
- Dual Fuel technology
- With room temperature thermostat to save energy
- Convection heat transfer providing comfort warming without drying throat



Model	GSDF-300T-VF	GSDF-300T-VF-R	RS 4200 DT	RS 4200 ST
Max. heat output	30000 btu	30000 btu	4.2 kW	4.2 kW
Fuel type	Dual Fuel LP / NAT	Dual Fuel LP / NAT	lp / nat	lp / nat
Integrated thermostat	Y	Y	Y	Y
Remote control	N	Y	N	N

⚠ The place of use should have good ventilation to avoid insufficient oxygen supply!

# ELECTRIC COMMERCIAL HEATER



## ELECTRIC HEATER

- Thermostatically controlled
- Fan only option
- Quiet operation



Model	REE 2000H REE 2000S	REE 3000H REE 3000S REE 3000R	REE 3300H REE 3300S REE 3300R	REE 5000H REE 5000S REE 5000R
Max. heat output	2000 W	3000 W	3300 W	5000 W
Voltage	220-240 V	220-240 V	220-240 V	360-400 V
Phase	single	single	single	3 phases
Heat setting	650 W / 1300 W / 2000 W	1500 W / 3000 W	1650 W / 3300 W	2500 W / 5000 W



Model	REE 2000H-PT REE 2000R-PT	REE 3000H-PT REE 3000R-PT	REE 5000H-PT REE 5000R-PT
Max. heat output	2000 W	3000 W	5000 W
Voltage	220-240 V	220-240 V	360-400 V
Phase	single	single	3 phases
Heat setting	1000 W / 2000 W	1500 W / 3000 W	2500 W / 5000 W



Model	REE 4800	REE 5000 X	REE 7500 X	REE 10000 X
Max. heat output	4800 W	5000 W	7500 W	10000 W
Voltage	120 V	220 V	220 V	220 V
Phase	1	3	3	3
Heat setting	1	Controlled by digital room temperature thermostat		
Remote control	N	Y	Y	Y
Digital display	N	Y	Y	Y



## REE 2000BD BASEBOARD ELECTRIC HEATER

- One touch operation
- LED Display screen



Device of thermal shock protection



Model	REE 2000BD
Max. heat output	2000 W
Voltage	220-240 V / 50-60 Hz
Remote control	Y
Digital display	Y

## REE 2000FS FREESTANDING ELECTRIC HEATER

Metal plate Integrated molding

Soft touch screen panel with remote control



High grade stainless steel backplate reflects infrared rays out

3 Step heat setting

PCBA controlled



Model	REE 2000FS
Max. heat output	2000 W
Voltage	220-240 V / 50-60 Hz
Remote control	Y
Digital display	Y



# FIRE PIT



## FIRE PIT

- Stainless steel burner
- LP, Natural gas, or dual-fuel available
- Decorative rocks and artificial wood logs
- Natural cement (composite) finishing



Model	RFP 15S	RFP 15L
Fuel type	lp / bio*, LP, NG	lp / bio*, LP, NG
Max. heat output	15 kW / 51000 btu	15 kW / 51000 btu
Heat setting	6–15 kW stepless variable	6–15 kW stepless variable
Height(cm)	31	104
Width(cm)	61	61
Depth(cm)	60	60

# FIRE TABLE



## FIRE TABLE

- Stainless steel burner
- Flame out protection
- Interated gas cylinder (5 kg) trolley
- Patented dual fuel system for both LP and NG
- Ceramic tile table surface
- Aluminum frame
- UV-proof ratten wooven wall



Model	RFT 12S	RFT 12L
Fuel type	lp / bio*, LP, NG	lp / bio*, LP, NG
Max. heat output	12 kW / 41000 btu	12 kW / 41000 btu
Heat setting	5–12 kW stepless variable	5–12 kW stepless variable
Ignition	Electric(AA–battery)	Electric(AA–battery)
Height(cm)	60	61
Width(cm)	110	123
Depth(cm)	110	77



# PATIO HEATER




## PATIO HEATER

- Easy assembly
- Variable heat output
- Quiet operation
- Tip-over safety shut-off



Model	REPH-01	REPH-01S	REPH-02	REPH-02S	REPH-03	REPH-03H
Fuel type	Is / Isop., LP, NG	Is / Isop., LP, NG	Is / Isop., LP, NG	Is / Isop., LP, NG	Is / Isop., LP, NG	Is / Isop., LP, NG
Max. heat output	12 kW / 41000 btu	12 kW / 41000 btu	3.5 kW / 12000 btu	3.5 kW / 12000 btu	15 kW / 51000 btu	15 kW / 51000 btu
Heat setting	5-12 kW Stepless variable	5-12 kW Stepless variable	2-3.5 kW Stepless variable	2-3.5 kW Stepless variable	5-15 kW Stepless variable	5-15 kW Stepless variable
Ignition	Piezo	Piezo	Piezo	Piezo	Electric(AA-battery)	Electric(AA-battery)



## GAS RADIANT HEATER

- Powerful heat output
- No electricity required
- Flame out protection
- Regulator and gas hose included
- Adjustable facing direction



Model	RE 5000A	RE 5000FS	RE 5000FS US
Gas type	lp / lnp	lp / lnp	LP
Max. heat output	4.2 kW	4.2 kW	15000 btu
Heating setting	1.5–4.2 kW stepless variable	1.5–4.2 kW stepless variable	5000–15000 btu stepless variable
Piezo ignition	optional	optional	Y
Tip over protection	NO	NO	Y

## TANK TOP HEATERS

- No electricity needed
- Outdoor use only
- Utility heater for ice fishing, hunting, camping, construction sites



Model	Gas type	Max. heat output	Heating setting	Piezo ignition	Tip over protection
RE 5000BS	LP	15000 btu	10000/12500/15000 btu	Y	NO
RE 5000BD	LP	30000 btu	10000–30000 btu 5 steps	Y	NO



# CAMPING



## FOLDABLE CAMPING GRILL AND STOVE

- Use with propane
- Outdoor use only
- Piezo ignition
- Double burner design, individual operated
- Compact foldable design (carrying bag optional)
- Large grilling area out of casting iron



Model	REG 6000	REG 6000A
Fuel type	lp / lnp	lp / lnp
Max. heat output	6 kW	6 kW
Nos. of burner	2	2
Heating area	110 mm x 110 mm x 2	110 mm x 110 mm x 1

# HAND TORCH




## HAND TORCH

- Ergonomic handle
- Needle valve adjustment
- Excess flow POL fitting
- Lightweight, easy to use



Model	RET 70	RET 70D	RET 550
Fuel type	Is / Iso, LP	Is / Iso, LP	Liquid Butane
Working pressure (EU)	4 bar	4 bar	7 bar
Working pressure (US)	14 bar	14 bar	7 bar
Max.heat output (EU)	70 kW	140 kW	5.5 kW
Max. heat output (US)	500,000 btu	1,000,000 btu	20,000 btu
Ignition	Piezo	Manual	Piezo

## RHHC 20/20 HIGH PRESSURE WASHER (HOT WATER)

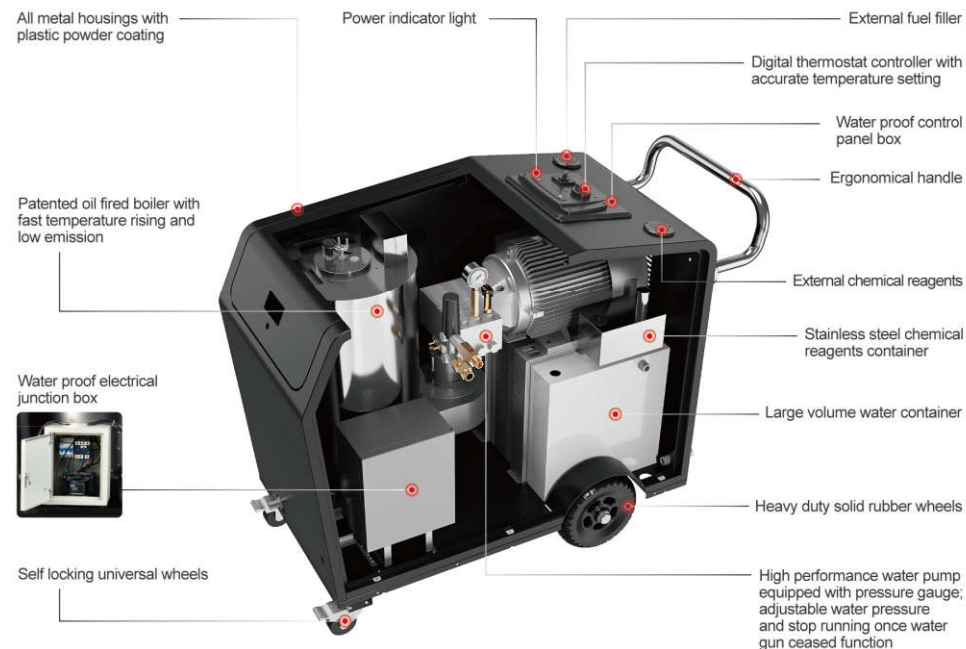

Model	RHHC 20/20
Outlet hot water pressure	30–200 bar
Max. outlet steam pressure	32 bar
Max. hot water temperature	98 °C
Max. steam temperature	155 °C
Flow rate	600–1300 l/h
Max. burner heat input	108 kW
Fuel tank size	25 L
Motor power	9.5 kW
Power supply	380–400 V / 50 Hz 3 Phases





## RHP 650 HIGH PRESSURE WASHER (COLD WATER)

- Safety protection
- Ergonomic handle
- Robust connector
- Extend holder
- Handle holder
- Comfortable storage
- Quick change
- Highly applicable and widely used



Working pressure (bar)	80		
Max pressure (bar)	100	Motor size (W)	1600 W
Working flow (l/min)	5-6.5	Voltages	110-120 V / 60 Hz, 220-240 V / 50 Hz
Auto s/s & Micro switch	✓	Carton meas. (L x W x H)	365 x 235 x 538 mm
Motor type	Carbon brush	G.W./N.W. (Estimated value)	4.7 kg

## REP 1200 Hybrid PAINT SPRAYER

- The paint gun is equipped with HD motor and a 1200ml large capacity tank
- It has a unique dust blowing & cleaning function/Airflow ventilation
- Very quick 3 spray patterns change for a wide range of work scenarios
- The patent bottle to achieve the quick clean
- Ergonomic handle compact design
- Working head and motor integrated design




Model	REP 1200 Hybrid
Voltage	110 - 240 V / 18-24 V
Power	650 W
Fluid rate	900 ml/min
Max. viscosity	120 din/s
Container capacity	1200 ml
Function	Quick cleaning function

# HEATING & VENTING COMBAT

SUITABLE FOR FARMS/GREENHOUSES



APPLICATION

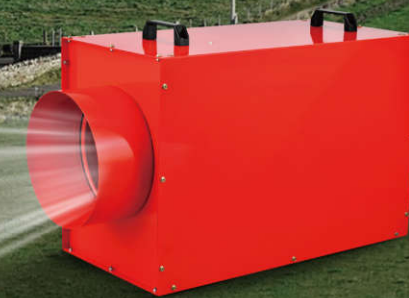

## GAS COMBAT

- One touch operation
- Automatic shut off in all failures
- Self diagnose and failure warnings
- Remote control
- Accessable to centralized control station



Model	REF-30N	REF-50N	REF-65ATF
Fuel type	LP/NAT	LP/NAT	LP/NAT
Max. heat output	30 kW / 102000 btu	30 kW / 102000 btu	65 kW / 220000 btu
Ventilation airflow	5000 CBM	5000 CBM	5000 CBM
Integrated thermostat	Y	Y	Y
Remote thermostat receptacle	Y	Y	Y
Hand remote control	y	y	y
Power supply	120 V / 60 Hz, 240 V / 50 Hz		

## DIESEL COMBAT

- One touch operation
- Automatic shut off in all failures
- Self diagnose and failure warnings
- Remote control
- Accessable to centralized control station

Model	REO 70GTH	REO 100GTH
Fuel type	Diesel/Paraffin/Kerosene	Diesel/Paraffin/Kerosene
Max. heat output	70 kW / 240000 btu	100 kW / 340000 btu
Max. fuel lift height	3 m	3m
Max. ventilation airflow	2000	2000
Integrated thermostat	Y	Y
Remote thermostat receptacle	Y	Y
Hand remote control	Y	Y
Power supply	120 V / 60 Hz, 240 V / 50 Hz	



Max. fuel lifting height up to 4 meters